




NEXEN N7000

Ultra High Performance Driving In All Season



ROAD HAZARD WARRANTY 1ST 25% FREE REPLACEMENT

- 4 Wide & Straight Channel Design.
- Multiple kerf Design - Up grade Snow Index & Traction.
- Shoulder Design - Up grade Cornering Stability.
- Aggressive type Lateral Grooves - Anti Hydroplaning.
- W and Y Rated.
- Silica Compound.

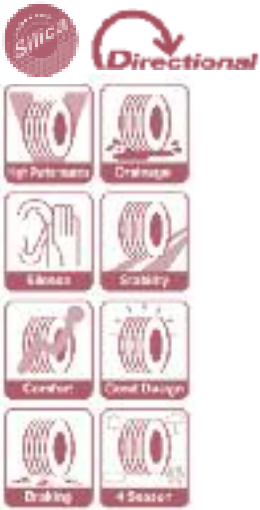

Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
55 SERIES - UTQG - 360 AA A									
NEW 205/55R16 94W	10626 NX	1477	50	5.5-7.5	8.4	24.9	10	23	\$
NEW 215/55R16 97W	10627 NX	1609	50	6.0-8.0	8.9	25.3	10	24	
NEW 215/55R17 94W	10630 NX	1433	44	6.0-7.5	8.9	26.3	10	27	
NEW 225/55R17XL 101W	10372 NX	1819	50	6.0-8.0			10		
NEW 235/55R17 99W	10631 NX	1709	44	6.5-8.5	9.6	27.2	10	29	
50 SERIES - UTQG - 360 AA A									
NEW 205/50R16 87W	10356 NX	1201	44	5.5-7.5					
NEW 215/50R17 91W	10625 NX	1356	44	6.0-7.5	8.9	25.5	10	23	
NEW 225/50R17 94V	10689NXX	65449							
45 SERIES - UTQG - 360 AA A									
205/45R16 87W	10611 NX	1201	50	6.5-7.5	8.2	23.1	10.0/32	21.0	
215/45R17 91W	10612 NX	1356	50	7.0-8.0	8.5	24.6	10.0/32	23.0	
225/45R17 91W	10613 NX	1356	44	7.0-8.5	8.9	25.0	10.0/32	24.0	
235/45R17 97W	10614 NX	1609	50	7.5-9.0	9.4	25.3	10.0/32	26.0	
245/45R17 95W	10615 NX	1521	44	7.5-9.0	9.6	25.7	10.0/32	28.0	
245/45R18 100W	10617 NX	1764	50	7.5-9.0	9.6	26.7	10.0/32	29.0	
255/45R18 103W	10624 NX	1929	50	8.0-9.5	10.0	27.0	10.0/32	31.0	
40 SERIES - UTQG - 360 AA A									
205/40R16 79W	10540 NX	963	44	7.0-8.0	8.4	22.4	10.0/32	20.0	
205/40R17 84W	10556 NX	1102	50	7.0-8.0	8.4	23.5	10.0/32	21.0	
215/40R17 87W	10579 NX	1201	50	7.0-8.5	8.7	23.9	10.0/32	22.0	
235/40R17 90W	10582 NX	1323	44	8.0-9.5	9.6	24.3	10.0/32	24.0	
245/40R17 91W	10601 NX	1356	44	8.0-9.5	9.8	24.7	10.0/32	25.0	
255/40R17 94W	10607 NX	1477	44	8.5-10.0	10.2	25.0	10.0/32	26.0	
275/40R17 98W	10608 NX	1653	44	9.0-11.0	10.9	25.7	10.0/32	30.0	
225/40R18 92W	10581 NX	1389	50	7.5-9.0	9.1	25.1	10.0/32	23.0	
235/40R18 93W	10595 NX	1521	50	8.0-9.5	9.5	25.4	10.0/32	25.0	
245/40R18 97W	10602 NX	1609	50	8.0-9.5	9.8	25.7	10.0/32	26.0	
35 SERIES - UTQG - 360 AA A									
215/35R18 84W	10498 NX	1102	50	7.0-8.5	8.6	23.9	10.0/32	21.0	
265/35R18 97W	10519 NX	1609	50	9.0-10.5	10.7	25.3	10.0/32	27.0	
275/35R18 95W	10528 NX	1521	44	9.0-11.0	11.4	25.6	10.0/32	28.0	
NEW 235/35R19 91W	10505 NX	1356	50	8.0-9.5	9.5	25.5	10.0/32	23.0	
NEW 245/35R19 93W	10506 NX	1433	50	8.0-9.5	9.8	25.8	10.0-32	24.0	
225/35R20 90W	10500 NX	1323	50	7.5-9.0	9.5	25.5	10.0/32	25.0	
245/35R20 95W	10509 NX	1521	50	8.0-9.5	9.5	25.5	10.0/32	27.0	
255/35R20 97W	10510 NX	1609	50	8.5-10.0	10.2	27.0	10.0/32	29.0	
NEW 275/35R20 102Y	11005 NX	1874	50	9.0-11.0	10.9	27.6	10.0-32	30.0	
30 SERIES - UTQG - 360 AA A									
225/30R20 90W	10496 NX	1135	50	7.5-9.0	9.1	25.4	10.0/32	22.0	
NEW 235/30R20 88W	65446	1235			9.5	25.6	10	22.0	
NEW 235/30R22 90W	65447	1323			9.53	27.598	10	22.0	
NEW 245/30R22AL 92W	65448	1389			9.8	27.8	10	22.0	
NEW 275/30R20 97Y	11003 NX	1609	50	9.0-10.0	10.9	26.5	10.0/32	23.0	
NEW 255/30R24 97W	11002 NX	1609	50	8.5-9.5	10.2	30.1	10.0/32	31.0	

NEXEN CP521

Original Equipment



UTQG 360A A - 400A A

Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
P235/55R18 99H	10679	1709	44	6.5 - 8.5	9.3	28.1	10	29	\$
P235/60R17 100H	10610	1764	44	6.5 - 8.5	9.4	28.1	11	30	
215/65R16XL 102T	10616	1874	50	6.0 - 7.5	8.9	27	11	28	
215/65R17XL 104T	11554	1984	50	6.0 - 7.5	8.6	28	11	41	
225/65R16XL 104T	10618	1984	50	6.0 - 8.0	9	27.5	11	29	
P215/70R16 99T	10609	1709	44	5.5 - 7.0	8.7	27.9	11	28.3	

NEXEN N3000

Ultra High Performance Driving



- Directional Wide Aqua Groove Design.
- Arrow Center Rib Design - High speed Driving Performance.
- Shoulder Design - Up grade Cornering Stability.
- Aggressive type Lateral Grooves - Anti Hydroplaning.
- W and Y Rated.
- Silica Compound.



Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
55 SERIES - UTQG - 340 AA A									
205/55R16 94W	12077	1477	50	5.5-7.5	8.4	24.9	10	23.0	\$
215/55R16 97W	12078	1609	50	7.0	8.9	25.3	10	26.0	
NEW 225/55R16 95W	12006	1521	44	6.0-8.0	9.2	25.7	10	25.0	
50 SERIES - UTQG - 340 AA A									
215/50R17 91W	12079	1356	44	6.0-7.5	8.9	25.5	10	25.0	
225/50R17 94W	12080	1477	44	6.0-8.0	9.2	25.9	10	26.0	
45 SERIES - UTQG - 340 AA A									
195/45R15 78W	12053	937	44	6.0-7.5	7.8	21.9	10	18.0	
205/45R16 87W	12055	1201	50	6.5-7.5	8.2	23.1	10	20.0	
225/45R16 89W	12057	1279	44	7.0-8.5	8.9	23.9	10	23.0	
245/45R16 94W	12059	1477	44	7.5-9.0	9.6	24.6	10	27.0	
215/45R17 91W	12086	1356	50	7.0-8.0	8.5	24.6	10	22.0	
225/45R17XL 94W	10642	1356	44	7.0-8.5	8.9	25.0	10	24.0	
235/45R17 94W	12088	1477	44	7.5-9.0	9.4	25.3	10	26.0	
245/45R17 95W	12089	1521	44	7.5-9.0	9.6	25.7	10	28.0	
245/45R18 100Y	12044	1764	50	7.5-9.0	9.6	26.7	10	29.0	
255/45R18 103Y	12054	1929	50	8.0-9.5	10.0	27.0	10	30.0	
40 SERIES - UTQG - 340 AA A									
205/40R16 79W	12051	963	44	7.0-8.0	8.4	22.4	10	19.0	
215/40R16 86W	12052	1168	50	7.0-8.5	8.7	22.7	10	20.0	
205/40R17 84W	12081	1102	44	7.0-8.0	8.4	23.5	10	20.0	
215/40R17 87W	12082	1201	50	7.0-8.5	8.7	23.9	10	21.0	
235/40R17 90W	12083	1323	50	8.0-9.5	9.6	24.3	10	24.0	
245/40R17 91W	12090	1356	50	8.0-9.5	9.8	24.7	10	25.0	
255/40R17 94W	12084	1477	50	8.5-10.0	10.2	25.0	10	27.0	
275/40R17 98W	12085	1653	50	9.0-11.0	10.9	25.7	10	29.0	
225/40R18 92Y	12095	1389	50	7.5-9.0	9.1	25.1	10	23.0	
235/40R18 93Y	12008	1433	44	8.0-9.5	9.5	25.4	10	25.0	
245/40R18 97Y	12018	1609	50	8.0-9.5	9.8	25.7	10	26.0	
245/40R20 99Y	10177	1709	50	8.0-9.5	9.8	27.7	10	26.0	
NEW 275/40R20XL 106Y	11043	2094	50	9.0-11.0	10.9	10.0	10	34.7	
35 SERIES - UTQG - 340 AA A									
215/35R18 84Y	12091	1102	50	7.0-8.5	8.6	23.9	10	21.0	
255/35R18 94Y	12058	1477	50	8.5-10.0	10.2	25.0	10	25.0	
265/35R18 97Y	12063	1609	50	9.0-10.5	10.7	25.3	10	27.0	
275/35R18 95Y	12064	1521	44	9.0-11.0	10.9	25.6	10	27.0	
235/35R19 91Y	12073	1356	50	8.0-9.5	9.5	25.5	10	24.0	
225/35R20 90Y	12092	1323	50	7.5-9.0	9.1	26.2	10	25.0	
245/35R20 95Y	12094	1521	50	8.0-9.5	9.8	26.8	10	28.0	
255/35R20 97Y	12050	1609	50	8.5-10.0	10.2	27.0	10	31.0	
30 SERIES - UTQG - 340 AA A									
NEW 265/30R19 93Y	10041	1433	50	9.0-10.0	10.7	25.3	10	25.0	
NEW 275/30R19 92Y	10042	1565	50	9.0-10.0	10.9	25.6	10	26.0	
NEW 225/30R20 85Y	10179	1135	50	8.0	9.1	25.4	10	22.5	
NEW 235/30R20XL 88Y	11039	1235	50	8.5	9.5	25.6	10	22.9	
NEW 275/30R20 97Y	10143	1433	50	9.0-10.0	10.9	26.5	10	24.0	
NEW 285/30R20 99Y	10159	1709	50	9.5-10.5	11.4	26.8	10	28.0	
NEW 235/30R22XL 90Y	11037	123	50	8.5	9.5	27.6	10	25.9	
NEW 245/30R22 92Y	10040	1389	50	8.0-9.0	9.8	27.8	10	26.0	
NEW 265/30R22 97Y	10039	1609	50	9.0-10.0	10.7	28.3	10	29.0	
NEW 255/30R24 97Y	10139	1609	50	8.5-9.5	10.2	30.1	10	31.0	
NEW 275/30R24XL 101Y	11041	1819	50	9.0-10.0	10.9	30.6	10	36.9	
25 SERIES - UTQG - 340 AA A									
NEW 295/25R22 97Y	12096	1609	50	10.0-11.0	11.9	27.8	10	31.0	
NEW 275/25R24 96Y	10163	1565	50	10.0	11.1	29.4	10	30.0	

NEXEN CP662

Original Equipment



*UTQG 400 AA

- Rotation type design.
- Particular kerf design - Quiet driving.
- Shoulder design - Long mileage performance.
- Circumferential grooves - Reduce hydroplaning.

Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	OE Fitment	PRICE
P195/65R15 89S	11073*	1356	44	6	7.9	25	10	8.6	KIA SOUL	\$
P195/65R15 89T	11079	1279	50	6	7.7	25.1	10	8.9	KIA FORTE	
P205/55R16 89H	11074*	1356	44	6.5	8.4	24.9	10	9.5	KIA SOUL	
P205/55R16 89H	11080	1279	50	6.5	8.4	24.9	10	9.6	KIA FORTE	
P225/45R18 91V	11075*	1356	44	7.5	8.9	25.9	10	10.2	KIA SOUL	

NEXEN CP641

High Performance Driving



55,000 Treadwear Mileage Warranty

- Rotation Type Design.
- Particular kerf Design - Quiet Driving.
- Shoulder Design - Long Mileage Performance.
- Circumferential Grooves - Reduce Hydroplaning.
- H and V Rated.
- Silica Compound.



Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
65 SERIES - UTQG - 400 A A									
175/65R14 82H	12469	1047	44	5.0-6.0	6.9	23.1	9/32	17.0	\$
185/65R14 86H	12452	1168	44	5.0-6.5	7.4	23.5	10/32	18.0	
195/65R14 89H	12491	1279	44	5.5-7.0	7.8	23.5	10/32	19.0	
NEW 205/65R14 91H	12492	1356	44	5.5-7.5	8.2	24.5	10/32	21.0	
185/65R15 88H	12436	1235	44	5.0-6.5	7.3	24.6	10/32	19.0	
195/65R15 91H	12437	1356	44	5.5-7.0	7.7	25.1	10/32	20.0	
205/65R15 94H	12493	1477	44	5.5-7.5	8.0	25.6	10/32	22.0	
215/65R15 96H	10676	1565	44	6.0-7.5	8.6	26.2	10/32	25.0	
60 SERIES - UTQG - 400 A A									
NEW 165/60R14 75H	12326	853	44	4.5-6.0	6.7	21.8	9/32	15.0	
NEW 175/60R14 79H	12399	963	44	5.0-6.0	6.9	22.4	9/32	16.0	
185/60R13 80H	12440	992	44	5.0-6.5	7.1	21.8	10/32	16.0	
185/60R14 82H	12472	1047	44	5.0-6.5	7.2	22.7	10/32	17.0	
195/60R14 86H	12427	1168	44	5.5-7.0	7.9	23.2	10/32	19.0	
205/60R14 88H	12485	1235	44	5.5-7.5	8.1	23.7	10/32	21.0	
195/60R15 88H	12420	1235	44	5.5-7.0	7.8	24.2	10/32	20.0	
205/60R15 91H	12441	1356	44	5.5-7.5	8.1	24.7	10/32	22.0	
215/60R15 94H	12475	1477	44	6.0-7.5	8.6	25.1	10/32	23.0	
225/60R15 96H	12480	1565	44	6.0-8.0	8.9	25.6	10/32	26.0	
215/60R16 95H	12476	1521	44	6.0-7.5	8.6	26.0	10/32	24.0	
225/60R16 98H	12481	1653	44	6.0-8.0	8.9	26.5	10/32	27.0	
235/60R16 100H	12482	1764	44	6.5-8.5	9.4	27.1	10/32	29.0	
NEW 215/60R17 96H	11098	1560	-	-	8.7	26.0	10/32	-	
NEW 225/60R17 99H	11106	-	-	-	-	-	10/32	22.0	
NEW 235/60R17 102H	11107	-	-	-	-	-	11/32	24.3	
55 SERIES - UTQG - 400 A A									
195/55R15 85V	12465	1135	44	5.5-7.0	7.9	23.4	10/32	21.0	
205/55R16 91V	12404	1356	44	5.5-7.5	8.4	24.9	10/32	23.0	
215/55R16 93V	12468	1433	44	6.0-7.5	8.9	25.3	10/32	24.0	
225/55R16 95V	12406	1521	44	6.0-8.0	9.3	25.7	10/32	26.0	
NEW 215/55R17 94H	11103	-	-	-	-	-	11/32	24.3	
NEW 225/55R17 97V	11105	-	-	-	-	-	10/32	22.0	
235/55R17 99V	12497	1709	44	7.5	9.6	27.2	10/32	24.4	
50 SERIES - UTQG - 400 A A									
195/50R15 82V	12463	1047	44	5.5-7.0	7.9	22.7	10/32	19.0	
205/50R15 86V	12455	1168	44	5.5-7.5	8.5	23.1	10/32	21.0	
205/50R16 87V	12456	1201	44	5.5-7.5	8.5	24.1	10/32	22.0	
NEW 245/50R16 97V	12454	1609	44	7.0-8.0	10.0	25.7	10/32	29.0	
NEW 205/50R17 89V	11102	-	-	-	-	-	11	24.3	
215/50R17 91V	12479	1323	44	6.0-7.5	8.9	25.5	10/32	25.0	
225/50R17 94V	12457	1477	44	6.0-8.0	9.2	25.9	10/32	25.0	

NEXEN SB702

Metric Radial



- A Total balance tire that various functions & performances are combined.
- Optimum tire design and light weight profile provide fuel economy.

Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
70 SERIES - UTQG - 400 A B									
175/70R13 82T	10701	1036	44	4.5-6.0	7.0	22.7	9/32	16.0	\$
185/70R14 88T	10702	1210	36	4.5-6.5	7.3	24.2	9/32	18.0	
195/70R14 91T	10708	1340	36	5.0-7.0	8.0	24.8	9/32	20.0	
205/70R15 95T	10760	1488	36	5.0-7.0	8.0	26.3	10/32	24.0	
215/70R15 98T	10586	1653	44	5.5-7.5	8.7	26.8	10/32	25.0	
225/70R16 102T	10591	1874	44	6.0-7.5	8.9	28.3	10/32	28.0	



NEXEN SV820

Metric Radial



Tire Size	Code No.	Max Load Single	Max Load Dual	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
185R14/8	10209	1874	1765	65	5.5	7.4	25.7	12/32	24.0	\$
195R14/8	10558	2094	1985	65	5.5	7.5	26.4	12/32	26.0	
NEW 195R15LT/8	10522	2094	-	65	5.5	-	-	12/32	27.3	

- Strong driving performance due to 3 grooves and rib type of pattern design.
- Rib type for running performance on rainy roads and wear resistance.



NEXEN ROADIAN AT

Light Truck Radial



HIGH PERFORMANCE ON ALL TERRAIN

Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
BLACKWALL									
UTQG 500 A B									
P255/65R16 106T	10850	2094	44	6.0 - 8.0	10.4	28.9	11/32	35.0	\$
P235/70R16 104T	10854	1984	44	7.0 - 9.0	9.7	28.8	11/32	32.0	

- High rigidity tire for the exclusive use of SUV's.
- Perfect running performance on rough roads due to its rim protector.
- High running stability at high speed due to its straight groove.



NEXEN ROADIAN AT II

Light Truck Radial



HIGH PERFORMANCE ON ALL TERRAIN

Tire Size	Code No.	Max Load Single	Max Load Dual	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
OUTLINED WHITE LETTER										
UTQG 560 A B										
LT235/75R15/6	13747	1985	1820	50	6.0-7.0	9.2	28.9	14/32	33.0	\$
30X9.50R15/6	13717	1985		50	6.5-8.5	9.7	29.5	15/32	37.0	
31X10.50R15/6	13721	2270		50	7.0-9.0	10.7	30.5	15/32	41.0	
LT215/85R16/10	13706	2680	2469	80	5.5-7.0	8.3	30.5	15/32	39.0	
LT235/85R16/10	13715	3042	2778	80	6.0-7.0	9.1	31.8	15/32	44.0	
LT225/75R16/10	13753	2680	2470	80	6.0-7.0	8.8	29.3	15/32	39.0	
LT245/75R16/10	13743	3042	2778	80	6.0-7.5	9.8	30.4	15/32	42.0	
LT265/75R16/10	13729	3415	3085	80	7.0-9.0	10.5	31.7	15/32	47.0	
LT265/70R17/6	13712	2470	2270	50	7.0-9.0	11.0	32.2	15/32	42.0	
P245/70R17/6	13764	2205		44	6.5-8.0	9.8	30.6	12/32	34.0	
P265/70R17 113S	13762	2535		44	7.0-8.5	10.7	31.7	13/32	37.0	
P235/65R17/6	13759	2205		50	6.5-8.5	9.4	29.1	11/32	31.0	
P245/65R17/6	13752	2039		44	7.0-8.5	9.8	29.5	12/32	34.0	

- Wide & Waved Channel Design.
- Multiple kerf Design - Up grade Snow Index & Traction.
- Shoulder Design - Max. Load Durability & Cornering.
- Stream Line lateral Grooves - Anti Hydroplaning.
- Silica Compound.



NEXEN ROADIAN MT

Light Truck Radial



HIGH TRACTION ON MUD TERRAIN

Tire Size	Code No.	Max Load Single	Max Load Dual	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
OUTLINED WHITE LETTER										
LT235/75R15/6	10667	1985	1820	50	6.0-7.0	9.2	28.9	17/32	36.0	\$
LT265/75R16/8	10650	2998	2755	65	7.0-8.0	10.5	31.7	17/32	47.0	
LT235/85R16/10	10658	3042	2778	80	6.0-7.5	9.3	31.7	17/32	45.0	
31X10.50R15/6	10674	2270		50	7.0-9.0	10.6	30.5	18/32	42.0	

- Super Rigid Tread Block Design.
- Studdable Design - Up Grade Snow Index & traction.
- Shoulder Design - Max. Load Durability & low weight.
- Wide Grooves - Anti Skid on wet road surface.



NEXEN ROADIAN HP

SUV/LT Performance Radial



HIGH PERFORMANCE DRIVING FOR SUV

- "V" type & Straight Channel Design.
- Arrow type Center Rib - Up Grade Handling.
- Shoulder Design - Up Grade Cornering Stability.
- Organic Design All Grooves - Anti Hydroplaning.
- H and V speed Rated.
- Silica Compound.



Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
65 SERIES - UTQG - 460 A A									
235/65R17 108V	15465	2205	50	6.5-8.5	9.4	29.1	11/32	32.0	\$
60 SERIES - UTQG - 460 A A									
NEW 235/60R16 100V	11004	1764	44	6.5-8.5			11/32		
NEW 255/60R17 106V	11006	2094	44	7.0-9.0			11/32		
265/60R17 108V	15451	2205	44	7.5-9.5	10.7	29.5	11/32	37.0	
275/60R17 110V	15453	2337	44	7.5-9.5	11.0	30.0	11/32	38.0	
265/60R18 110H	15608	2337	44	7.5-9.5	10.7	30.5	11/32	38.0	
285/60R18 116V	15455	2756	44	8.0-10.0	11.5	31.5	11/32	42.0	
55 SERIES - UTQG - 460 A A									
255/55R18 109V	15558	2271	50	7.0-9.0	10.4	29.0	11/32	36.0	
NEW 275/55R20XL 117V	15471	2833	50	7.5-9.5			11/32		
50 SERIES - UTQG - 460 A A									
NEW 255/50R19XL 107V	11010	2149	50	7.0-9.0			11/32		
NEW 255/50R20 109V	15467	2271	50	7.0-9.0	10.4	30.1	11/32	35.0	
NEW 265/50R20 111V	15469	2403	50	7.5-9.5	10.9	30.5	11/32	37.0	
NEW 285/50R20XL 116V	15473	2756	50	8.0-10.0			11/32		
45 SERIES - UTQG - 460 A A									
NEW 285/45R19XL 111V	11009	2403	50	9.0-10.5			11/32		
NEW 265/45R20 108V	15468	2205	50	8.5-10.0	10.5	29.4	11/32	37	
NEW 275/45R20 110V	15454	2337	50	8.5-10.5	10.7	29.8	11/32	36.0	
295/45R20 114V	15459	2601	50	9.5-11.0	11.7	30.5	11/32	39.0	
285/45R22 114V	15466	2601	50	9.0-10.5	11.2	32.1	11/32	39.0	
305/45R22 118V	15452	2910	50	9.5-11.5	11.9	32.8	11/32	48.0	
40 SERIES - UTQG - 460 A A									
NEW 275/40R20 106V	15470	2094	50	9.0-11.0	10.9	28.7	11/32	33.0	
295/40R20 106V	15463	2094	44	10.0-11.5	11.9	29.3	11/32	37.0	
305/40R22 114V	15460	2601	50	10.0-12.0	12.3	31.6	11/32	45.0	
35 SERIES - UTQG - 460 A A									
NEW 265/35R22 102V	15456	1874	50	9.0-10.5	10.7	29.3	11/32	34.0	
NEW 285/35R22 106V	15472	2094	50	9.5-11.0	11.4	29.9	11/32	37.0	
NEW 295/35R24 110V	15474	2337	50	10.0-11.5	11.9	32.1	11/32	47.0	
NEW 305/35R24 112V	15354	2469	50	10.0-12.0	12.3	32.4	11/32	47.0	
30 SERIES - UTQG - 460 A A									
255/30R22 95V	15464	1389	50	8.5-9.5	10.2	26.1	11/32	30.0	
295/30R22 103V	15457	1929	50	10.0-11.0	11.9	29.0	11/32	37.0	

NEXEN ROADIAN HT SUV

SUV/LT Radial



60,000 Treadwear Mileage Warranty HIGH PERFORMANCE ON HIGHWAY TERRAIN FOR SUV

- Wide Channel Design.
- Multiple kerf Design - Up grade Snow Index & Traction.
- Shoulder Design - Max. Load Durability & Cornering.
- Twin type Block Design - Up Grade Durability & Road Contact.
- S-Speed Rated.
- Silica Compound.

Tire Size	Code No.	Max Load	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
OUTLINED WHITE LETTER									
75 SERIES - UTQG - 520 A B									
P215/75R15 100S	14546	1742	44	5.0-7.0	8.5	27.7	12/32	28.0	\$
NEW P225/75R15 102S	71474	1874	44	6.0-7.5	8.8	28.3	12/32	29.0	
P235/75R15 105S	14747	2028	44	6.0-8.0	9.3	28.9	12/32	31.0	
P225/75R16 104S	14553	1984	44	6.0-7.5	9.2	29.3	12/32	31.0	
P245/75R16 109S	14443	2271	44	6.5-8.0	9.8	30.5	12/32	35.0	
70 SERIES - UTQG - 520 A B									
P225/70R15 100S	14851	1753	44	6.0-7.5	9.0	27.4	12/32	28.0	
P235/70R15 102S	14852	1896	44	6.0-8.0	9.4	28.0	12/32	29.0	
P255/70R15 108S	14428	2183	44	6.5-8.5	10.2	29.1	12/32	33.0	
P265/70R15 110S	14429	2337	44	7.0-9.0	10.7	29.6	12/32	36.0	
P235/70R16 104S	14854	1984	44	6.0-8.0	9.4	29.0	12/32	31.0	
P245/70R16 107S	14855	2149	44	6.5-8.0	9.8	29.5	12/32	32.0	
P255/70R16 109S	14856	2271	44	6.5-8.5	10.2	30.1	12/32	35.0	
P265/70R16 112S	14857	2469	44	7.0-9.0	10.7	30.6	12/32	38.0	
P275/70R16 114S	14860	2601	44	7.0-9.0	11.0	31.2	12/32	40.0	
P245/70R17 108S	14864	2205	44	6.5-8.0	9.8	30.6	12/32	34.0	
P265/70R17 113S	14862	2535	44	7.0-9.0	11.1	30.6	12/32	40.0	
NEW P255/70R18 112S	71472	2469	44	6.5-8.5	9.0	32.0	12/32	36.3	
65 SERIES - UTQG - 520 A B									
NEW 225/65R17 100H	71473	1764	44	6.0-8.0	9.0	28.5	12/32	28.9	
P235/65R17 103S	14859	1929	44	6.5-8.5	9.4	29.1	12/32	31.0	
P245/65R17 105S	14952	2039	44	7.0-8.5	9.8	29.5	12/32	33.0	
NEW P255/65R17 108S	65437	2337			10.2	30.0	12/32	26.5	
NEW P265/65R17 110S	65438	2337			10.2	30.0	12/32	26.5	
P235/65R18 104H	70476	1984	44.0	6.5-8.5	9.4	30	11/32	32.28	
NEW 265/65R18 112S	71470	2469	44.0	7.5-9.5	10.7	31.5	11/32	37.5	
NEW 275/65R18 114S	71471	2601	44.0	7.5-9.5	9.0	32	11/32	38.3	
60 SERIES									
NEW P235/60R17 102S	65436	1874			9.4	28.1	12/32	26.5	
NEW P235/60R18 102H	11007	1874	44	6.5-8.5	9.4	29.1	11/32	30.2	
NEW P245/60R18 10H	11008	1984	44	7.0-8.5	9.8	29.6	11/32	31.8	
NEW 275/60R18 111H	65450							36.9	



NEXEN ROADIAN HT LT

Light Truck Radial



HIGH PERFORMANCE ON HIGHWAY TERRAIN FOR LT

Tire Size	Code No.	Max Load Single	Max Load Dual	Max PSI	Rim Width	Section Width	Overall Diameter	Tread Depth	Weight	PRICE
OUTLINED WHITE LETTER										
LT215/75R15/6	13146	1764	1610	50	5.0-7.0	8.5	27.7	14/32	30.0	\$
LT235/75R15/6	13247	1984	1820	50	6.0-7.0	9.3	28.9	14/32	34.0	
30X9.50R15/6	13417	1984		50	6.5-8.5	9.4	29.5	15/32	36.0	
31X10.50R15/6	13421	2271		50	7.0-9.0	10.6	30.5	15/32	41.0	
LT245/75R16/10	13443	3042	2778	80	6.0-7.5	9.8	30.5	15/32	42.0	
LT265/75R16/10	13629	3686	3415	80	7.0-8.0	10.5	31.7	15/32	46.5	
BLACKWALL										
LT225/75R16/10	13653	2679	2679	80	6.0-7.0	8.8	29.3	15/32	39.0	
LT215/85R16/10	13506	2679	2470	80	5.5-7.0	8.5	30.4	15/32	38.0	
LT235/85R16/10	13415	3042	2778	80	6.0-7.5	9.3	31.7	15/32	45.0	

- Wide Channel Design.
- Multiple kerf Design - Up grade Snow Index & Traction.
- Shoulder Design - Max. Load Durability & Cornering.
- Multi Edge Block Design - Up Grade Durability & Road Contact.
- Silica Compound.